


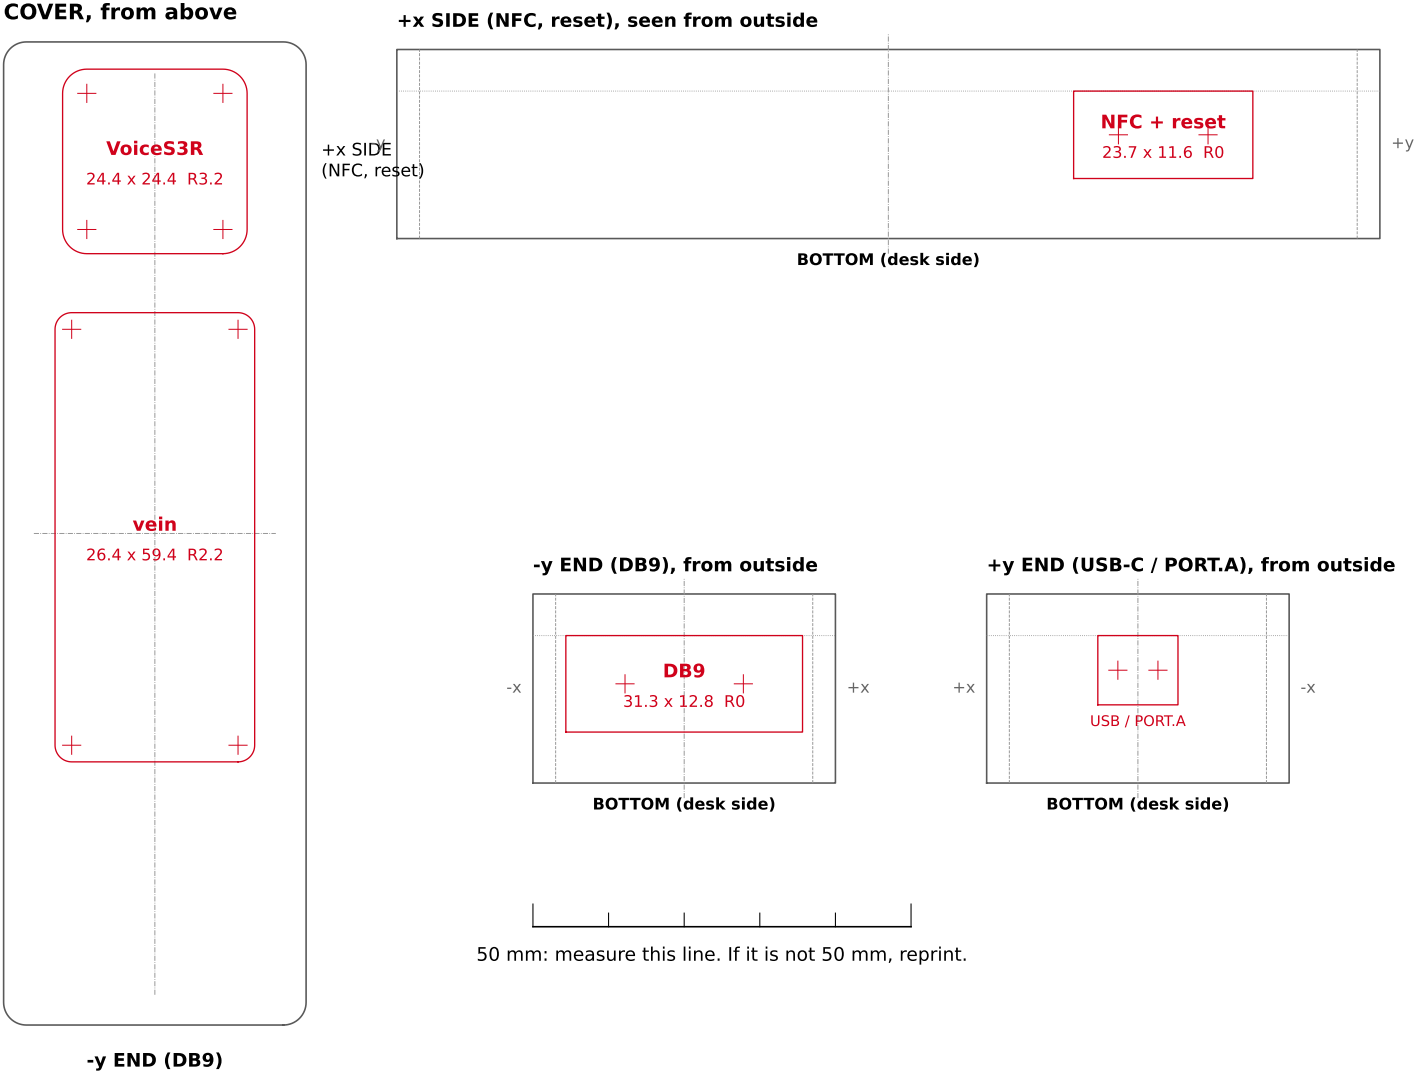

Vein Station sw130I - Takachi SW-130B cutting template, 1:1 (cover, +x side, both ends, from outside)

PRINT AT 100% / ACTUAL SIZE (no "fit to page", no scaling).

Cut the views apart. Cover: face up on the cover, grey outline (40 x 130, R3) on the cover edges.

Side / ends: the grey line is the whole case (cover on, 25 high): its **BOTTOM** edge on the desk side of the body, its ends on the case ends. All wall cuts are in the body; the DB9, USB and reset cuts are open to its top edge (dotted).

Also cut the cover's -y end wall away over the DB9 (31.3 wide, all 3 up to the top plate) and file its +y edge 0.5 over the USB (10.6 wide).

Red = cut through; + = corner drill centres. Unit mm.

Distances: cover from the outline edges; side / ends from the ends, the bottom (floor outside) and the top.

vein	26.4 x 59.4	R2.2	-x	6.8	+x	6.8	-y	34.8	+y	35.8	drill at the + marks, dia 4.4 or less
VoiceS3R	24.4 x 24.4	R3.2	-x	7.8	+x	7.8	-y	102.0	+y	3.6	drill at the + marks, dia 6.4 or less
NFC + reset	23.7 x 11.6	R0	-y end	89.5	+y end	16.8	bottom	7.9	top	5.5	
DB9	31.3 x 12.8	R0	-x side	4.3	+x side	4.3	bottom	6.7	top	5.5	
USB / PORT.A	10.6 x 9.2	R0	+x side	14.7	-x side	14.7	bottom	10.3	top	5.5	