COVER, seen from above

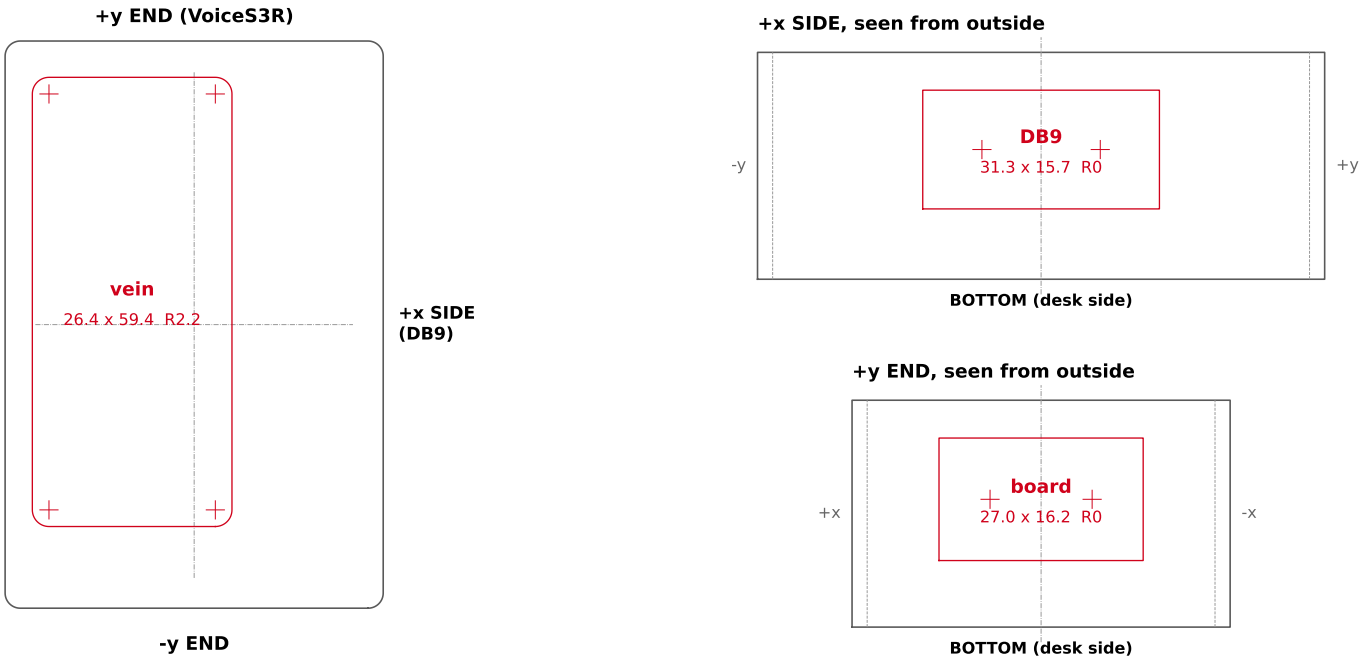

50 mm: measure this line. If it is not 50 mm, reprint.

Vein Station sw75g - Takachi SW-75B cutting template, 1:1 (cover, +x side, +y end, all seen from outside)

PRINT AT 100% / ACTUAL SIZE (no "fit to page", no scaling).

Cut the three views apart. Cover: face up on the cover, grey outline (50 x 75, R2) on the cover edges.

Side / end: the grey line is the whole case (cover on, 30 high): its BOTTOM edge on the desk side of the body,

its ends on the case ends; dashed = where the corner radius starts. All wall cuts are in the body.

The DB9 and board cuts are open to the top of the body (so the board drops in): cut up to the body's edge.

Red = cut through; + = corner drill centres. Unit mm.

Distances: cover from the outline edges; side / end from the ends, the bottom (floor outside) and the top

(the cover's top face, 30 above the bottom).

```
vein       26.4 x 59.4  R2.2  -x   3.6  +x  20.0  -y  10.8  +y   4.8   drill at the + marks, dia 4.4 or less

DB9        31.3 x 15.7  R0    -y end  21.9  +y end  21.9  bottom   9.3  top   5.0

board      27.0 x 16.2  R0    +x side  11.5  -x side  11.5  bottom   8.8  top   5.0
```